

LONWOOD PERFORMA

LONSEAL

LONWOOD PERFORMA is designed for interior use in high-volume foot traffic and high-impact athletic and aerobic applications. With its substantial foam layer it provides an exceptional anti-fatigue flooring option.

STANDARD SIZES (nominal)


Overall thickness: 0.220" (5.5 mm)
Wear layer thickness: 0.020" (0.5 mm)
Roll Size: 6' (1.83 m) wide x 60' (18.3 m)
Weight: 1.3 lb/sq. ft., 460 lbs/roll
Colors: Two available

15-YEAR WARRANTY

Lonseal offers a 15-year limited warranty.

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOC's
- Over 10% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- Floorscore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
 - Low Emitting Materials
- Adhesives and Sealants: IEQ Credit 4.1
- Flooring Systems: IEQ Credit 4.3

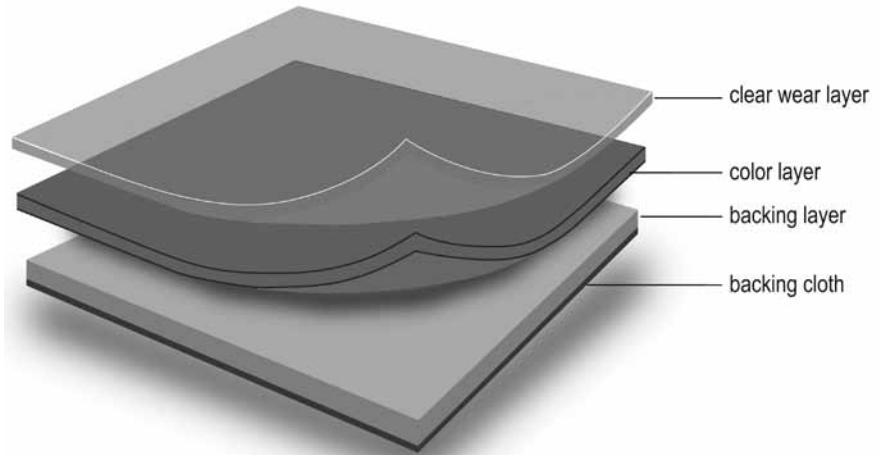

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.93, Neolite w/Finish: 0.98
Abrasion Resistance, ASTM D3884.....	0.23%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	450 PSI
Short-term Indentation, ASTM F1914.....	0.002" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.3, Color: 4.0, Change: 4.4
Dimensional Stability, ASTM F2199.....	0.07% loss
Heat Stability, ASTM F1514.....	Pending
Light Stability, ASTM F1515.....	Pending
Critical Radiant Flux, ASTM E648.....	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	No Change

For detailed installation information, please refer to Lonseal's Technical Manual for Interior Flooring Products at www.lonseal.com.



LONSEAL, INC.
 928 E. 238th Street, Carson, CA 90745 USA
 800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 04.25.12